EasyAir





Roating heat exchanger



Balanced ventilation



2 pcs. automatic damper



Low noise level



Low energy consumption



Installation from the inside





Available in white or anthracite grey.





BUILT-IN

Humidity sensor ✓

Frost protection ✓

Basic ventilation ✓

CO2 sensor ✓

Timer function ✓




-Fresh air for everyone

EasyAir



TECHNICAL SPECIFICATIONS

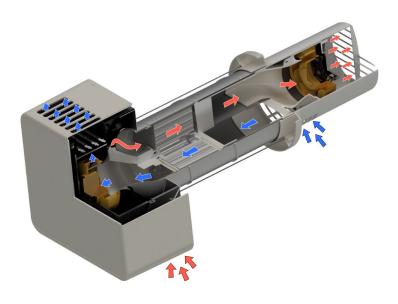

	Factory settings	*User adjustment
Air volume	20 – 54 m3/h	20 – 100 m3/h
Power consumption	17 – 27 Watt	17 – 63 Watt
Standby	1.2 Watt	1.2 Watt
Noise level	20 – 35 dB(A)	20 – 52 dB(A)
Heat recovery	81 – 74%	81 – 64%
Dimensions, inner (WxHxD)	345x350x190mm	
Dimensions, outer	Ø160x215mm	
Weight	10 kg	
Channel lead-in	Ø180mm	
Filter type	Mono-filtered mesh, polyamide	

- The purpose of Easy Air is to create balanced ventilation with heat recovery by means of mechanical injection and extraction.
- Easy Air is a decentralised system for the supply of one room.
- Easy Air is a ventilation system for balanced mechanical ventilation in which the driving forces are electrically powered fans. The system consists of mechanical extraction and injection air as well as a heat recovery unit. Filters and dampers are used to treat the air.

