


Datasheet TX750

TX 750 Technical specifications


Technical data	Filter class	30 dB(A)	35 dB(A)
Maximal capacity*	ePM ₁₀ 50%	600 m ³ /h	750 m ³ /h
Power consumption		54 W	82 W
Temperature efficiency		82%	78%
Duct	2 X Ø315		
Supply	1x230 V + N + PE / 50 Hz		
Weight	99 kg		
Materials	Aluminium		
Counterflow exchanger	Aluminium		
Dimension LxDxH	1800x895x565 mm		
Supply filter	ePM ₁₀ 50% or ePM ₁ 55%		
Exhaust filter	ePM ₁₀ 50%		
Color	RAL 9010		
Supply cable	3G 1mm ²		
Recommended fuse	10 A		
Recommended residual current device	Type A		
Leakage current	≤0,7 mA		
Electrical heating (option)	1000 W		

1 All measurements were made during normal operation in a standard installation situation at filter class, for air / exhaust air: ePM₁₀ 50% / ePM₁₀ 50% and for air / exhaust air ePM₁ 55% / ePM₁₀ 50%. Sound measurements were made in a test room of 70 m³. Sound measurements have been prepared on the basis of DS / EN ISO 10052

Capacity with $ePM_{10}50\%$ [M5] / $ePM_{10}50\%$ [M5]

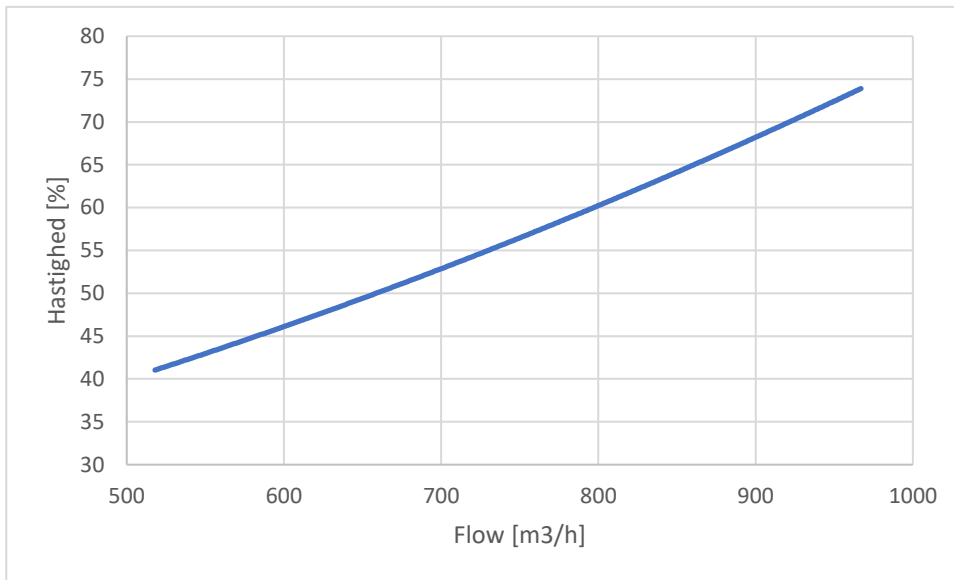


TX 750A

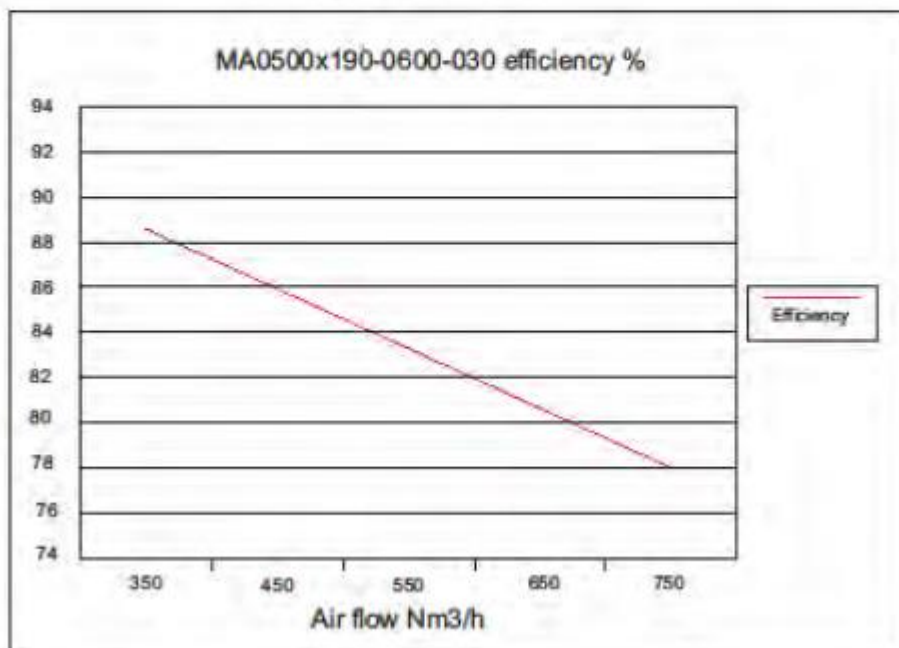


Power consumption

Measurement with $ePM_{10}50\%$ / $ePM_{10}50\%$ filter

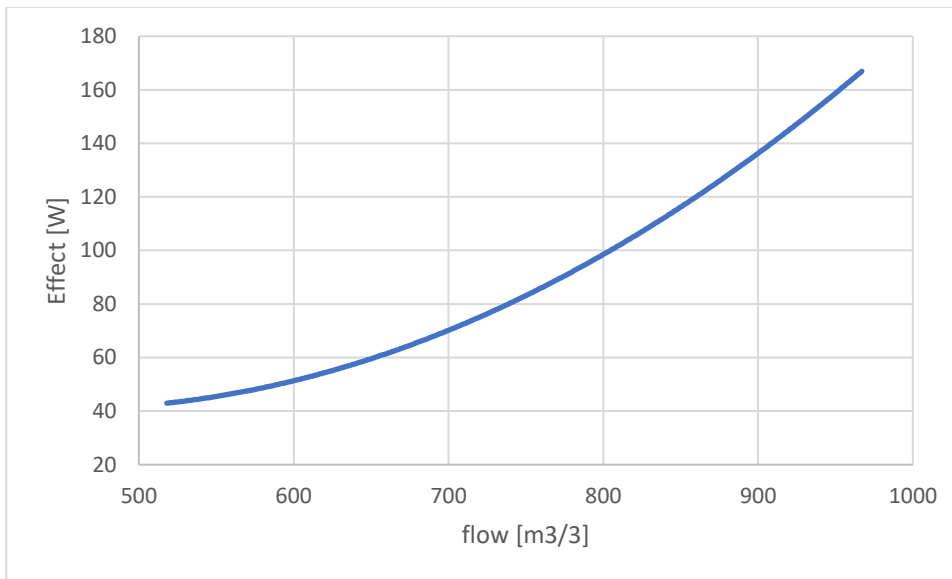

SEL

Measurement with $ePM_{10}50\%$ / $ePM_{10}50\%$ filtre

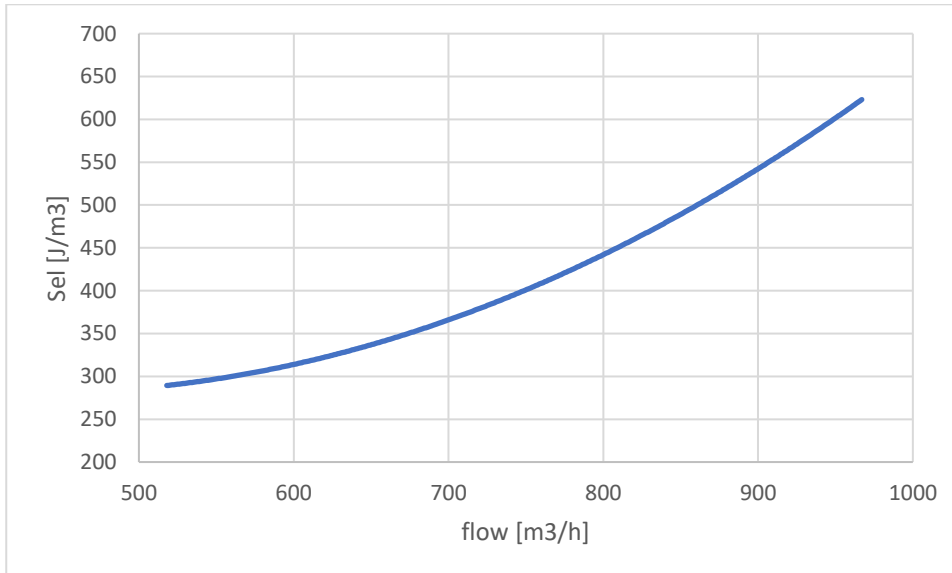

Throwlength

